arXiv:1301.2895v1 [cond-mat.stat-mech] 14 Jan 2013

(K, K')-Protected Core Percolation

Hai-Jun Zhou[1]*, Jin-Hua Zhao[1], and Yang-Yu Liu[2,3]
[1] *State Key Laboratory of Theoretical Physics, Institute of Theoretical Physics,*
Chinese Academy of Sciences, Zhong-Guan-Cun East Road 55, Beijing 100190, China
[2] *Center for Complex Network Research and Department of Physics,*
Northeastern University, Boston, Massachusetts 02115, USA and
[3] *Center for Cancer Systems Biology, Dana-Farber Cancer Institute, Boston, Massachusetts 02115, USA*
(Dated: January 15, 2013)

We present an analytical theory for the (K, K')-protected core percolation problem. Each initially protected vertex transits to the susceptible state if it has less than K protected neighbors or if one of its susceptible neighbors has less than K' protected neighbors. The theory predicts (K, K')-protected core percolation to be a discontinuous transition for any type of uncorrelated networks and any $K, K' \geq 2$. We check these predictions by extensive computer simulations for the representative cases of $K' = K$. For random networks both the transition point and the (K, K)-protected core size are predicted precisely by our theory. For low-dimensional lattices the transition point fluctuates considerably, but our theory still predicts precisely the (K, K)-protected core size once the transition occurs. The theory is also applied successfully to real-world complex networks.

PACS numbers: 64.60.ah, 64.60.aq, 05.70.Fh

Network percolation is underlying various phase transition phenomena in physical and information systems [1, 2]. The simplest percolation is the emergence of a giant connected component in the network (site or bond percolation), which is deeply related to information propagation processes, such as disease spreading, opinion evolution, power-grid cascading failures, and resources transportation in biological systems [3–9]. The K-core of a network is the surviving subnetwork after all the vertices with less than K neighbors have been recursively removed from the network. K-core emergence is a percolation transition [10–12], and it is strongly related to the phenomenon of particle jamming in glassy systems [13, 14] and variable-state freezing in constraint satisfaction problems [15] and Boolean dynamic networks [16]. Another network percolation process is the core formation [17–19]. The core of a network is obtained by a greedy leaf-removal procedure that repeatedly removing isolated vertices and vertices that are attached by a dangling edge. The existence of a percolating core causes great computational complexity in constraint optimization problems such as the minimal vertex cover problem [20, 21] and is also very significant for network control [22]. Network explosive percolations [23–28]) are also intensively studied.

Here we introduce and study a new network percolation problem, namely (K, K')-protected core percolation. In the model, besides the network connection pattern, each vertex also has a binary internal state (protected or susceptible). Initially all the vertices are in the protected state. As time evolves, a protected vertex *spontaneously* transits to the susceptible state if it has less than K protected nearest neighbors. A protected vertex with K or more protected nearest neighbors is *induced* to the susceptible state if at least one of its susceptible nearest neighbors has less than K' protected nearest neighbors. The (K, K')-protected core is the subnetwork formed by all the surviving protected vertices and edges between them (Fig. 1 shows a simple example for $K = K' = 2$). For $K' \geq 2$, the (K, K')-protected core percolation differs from the K-core percolation in that a susceptible vertex may induce the neighboring protected vertices into the susceptible state.

(K, K')-protected core percolation is qualitatively related to many collective dynamical processes. One example is the frozen-core formation in Boolean satisfiability problems [29, 30], where non-frozen vertices can induce its frozen neighbors into the non-frozen state under certain conditions (the whitening process [31–33]).

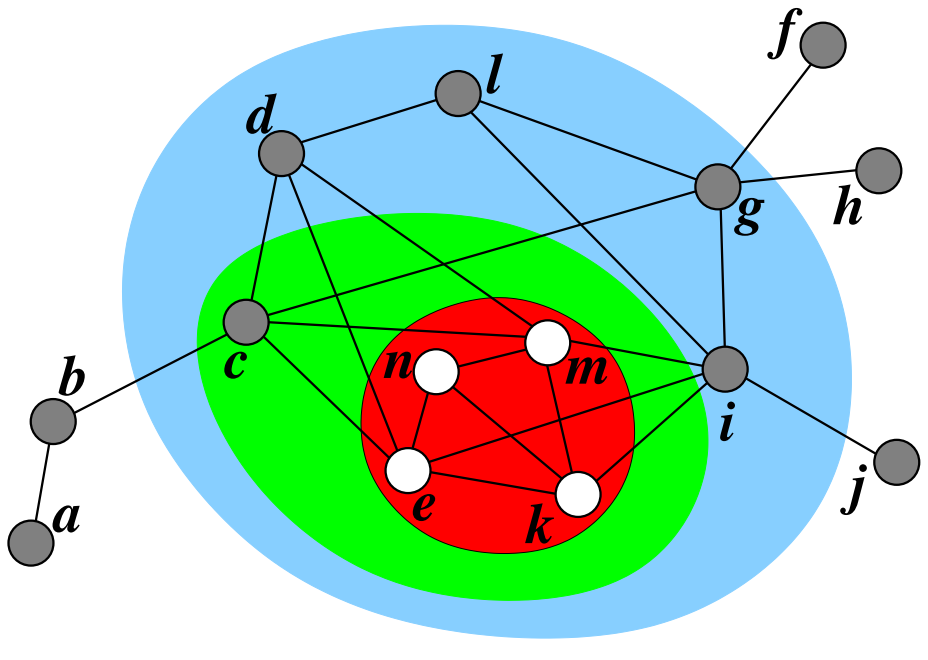

FIG. 1: (color online). The $(2, 2)$-protected core (highlighted in red) of a small network. The $(2, 2)$-protected core is contained in the core (highlighted in green), which is again contained in the 2-core (highlighted in light blue). Protected and susceptible vertices are represented by white and black circles, respectively.

---

*Corresponding author. Email: `zhouhj@itp.ac.cn`

Another example is the glassy dynamics of kinetically constrained models, in which a spin in a certain state facilitates the flipping of its neighboring spins [34]. In inter-dependent networks, a collapsed vertex of one network causes the failure of the connected vertices in the other network [35–37], sometimes resulting in a percolating damage cascading process. (K, K')-protected core percolation also serves as a spreading model of a new product, with an adopted agent being able to persuade all his k non-adopted friends to adopt the product if $k < K'$. It may also be strongly related to jamming in transportation systems [38, 39].

We present an analytical theory to describe (K, K')-protected core percolation. The theory predicts that the percolation transition is always discontinuous for any type of uncorrelated networks and any values of the control parameters $K, K' \geq 2$. We confirm the theoretical predictions by performing simulations for the representative cases of $K' = K$.

Theory.— We consider a network formed by N vertices and M edges between pairs of vertices. If two vertices i and j are connected by an edge, then they are nearest neighbor to each other (self-connection and multiple edges between the same pair of vertices are not allowed). The degree of a vertex is its number of nearest neighbors; and the degree profile $P(k)$ quantifies the the fraction of vertices with each degree k, with the property that $\sum_{k\geq 0} P(k) = 1$. The mean vertex degree of the network is $c \equiv 2M/N = \sum_{k\geq 0} kP(k)$. In the analytical theory the network is assumed to be uncorrelated. In such a random network the connection pattern is completely random, with only minimal degree-degree correlations between nearest-neighboring vertices. We will study random regular (RR) networks, Erdös-Rényi (ER) networks and random scale-free (SF) networks [40, 41].

Each vertex of the network has two possible states, protected or susceptible. An initially protected vertex may spontaneously transit to the susceptible state or be induced to the susceptible state by its susceptible nearest neighbors. A non-empty (K, K')-protected core of protected vertices may form in the network after the state evolution reaches the final steady-state, each vertex of which having $\geq K$ protected nearest neighbors and with each of the susceptible nearest neighbor having $\geq K'$ protected nearest neighbors itself. For notational simplicity we discuss in the main text the representative cases of $K' = K$. The general cases of $K' \neq K$ have the same qualitative properties [42]. In what follows we refer (K, K)-protected core simply as K-protected core.

Since the typical loop length of a random network scales logarithmically with vertex number N, the network is locally tree-like [40, 43]. We therefore assume that given a vertex i being in the protected state, the states of all its nearest neighbors are mutually independent. This is a specific version of the Bethe-Peierls approximation (also called the tree approximation), commonly used in spin-glass theories, statistical inference, and complex network studies [3–5, 44]. Under this approximation we then obtain an analytical expression for the normalized size $n_{\text{p-core}}$ of the K-protected core:

$$n_{\text{p}-\text{core}} = \sum_{k\geq K} P(k) \sum_{s=K}^{k} \binom{k}{s} (1-\alpha-\beta)^s \beta^{k-s} \ . \quad (1)$$

In Eq. (1), α denotes the probability that a vertex j reached by following a randomly chosen edge (i, j) is in the susceptible state and having at most $K-2$ protected nearest neighbors if not counting vertex i; and β is the probability that such a vertex j is in the susceptible state but having at least $K-1$ protected nearest neighbors if not counting vertex i. Let us further define γ as the probability that such a vertex j is in the protected state and having exactly K protected nearest neighbors (including vertex i). The probability that vertex j has k nearest neighbors is denoted as $Q(k)$. For an uncorrelated network $Q(k)$ has the simple expression $Q(k) = kP(k)/c$ [40, 41, 43].

Using the same Bethe-Peierls approximation, the following self-consistent equations are obtained for the (cavity) probabilities α, β and γ:

$$\begin{aligned}
\alpha &= 1 - \sum_{k\geq K} Q(k) \sum_{s=K-1}^{k-1} \binom{k-1}{s} (1-\alpha-\beta)^s (\alpha+\beta)^{k-1-s} \\
&\quad + \sum_{k\geq K+1} Q(k) \sum_{s=K-1}^{k-2} \binom{k-1}{s} \left[(\alpha+\beta)^{k-1-s} - \beta^{k-1-s}\right] \sum_{r=0}^{K-2} \binom{s}{r} (1-\alpha-\beta-\gamma)^r \gamma^{s-r} \ , \qquad (2) \\
\beta &= \sum_{k\geq K+1} Q(k) \sum_{s=K-1}^{k-2} \binom{k-1}{s} \left[(\alpha+\beta)^{k-1-s} - \beta^{k-1-s}\right] \sum_{r=K-1}^{s} \binom{s}{r} (1-\alpha-\beta-\gamma)^r \gamma^{s-r} \ , \qquad (3) \\
\gamma &= \sum_{k\geq K} Q(k) \binom{k-1}{K-1} (1-\alpha-\beta)^{K-1} \beta^{k-K} \ . \qquad (4)
\end{aligned}$$

The second term on the right hand side of Eq. (2) is the probability that, when vertex j is still in the protected state, $s \geq (K-1)$ of its nearest neighbors (excluding vertex i) are also in this state. Even if vertex j in its protected state has $\geq K$ protected nearest neighbors, it will still be induced into the susceptible state if it has a susceptible nearest neighbor which is surrounded by at most $K-1$ protected nearest neighbors. After j becomes susceptible, one or more of its protected nearest neighbors m (other than i) will spontaneously transit into the susceptible state if m originally has only K protected nearest neighbors. Then the number of protected nearest neighbors of j (not counting i) may be decreased to a value $r < K-1$. The last term of Eq. (2) is just the probability for this to happen. Equations (3) and (4) are understood similarly.

Equations (2), (3) and (4) always have the trivial solution $\alpha = 1, \beta = \gamma = 0$, for which the normalized K-protected core size is $n_{\text{p-core}} = 0$. This solution is always locally stable [42], and it is the only solution if the network has too few edges. When edges are added to increase the mean vertex degree c, the degree profile $P(k)$ will be changed. At certain critical value $c = c^*$ another stable solution suddenly appears. The value of α at c^* is strictly less than 1, and $n_{\text{p-core}}$ jumps from 0 to a value $n^*_{\text{p-core}}$ that is strictly larger than 0 [42]. The theory therefore predicts a discontinuous K-protected core percolation transition for any type of uncorrelated network and any value of $K \geq 2$. The analytical theory also predicts that, for any $K \geq 2$ and independent of network type, $n_{\text{p-core}} - n^*_{\text{p-core}} \propto (c - c^*)^{1/2}$ when c is only slightly beyond the critical value c^* [42]. Such a scaling behavior was also observed in K-core percolation and core percolation [10–12, 19].

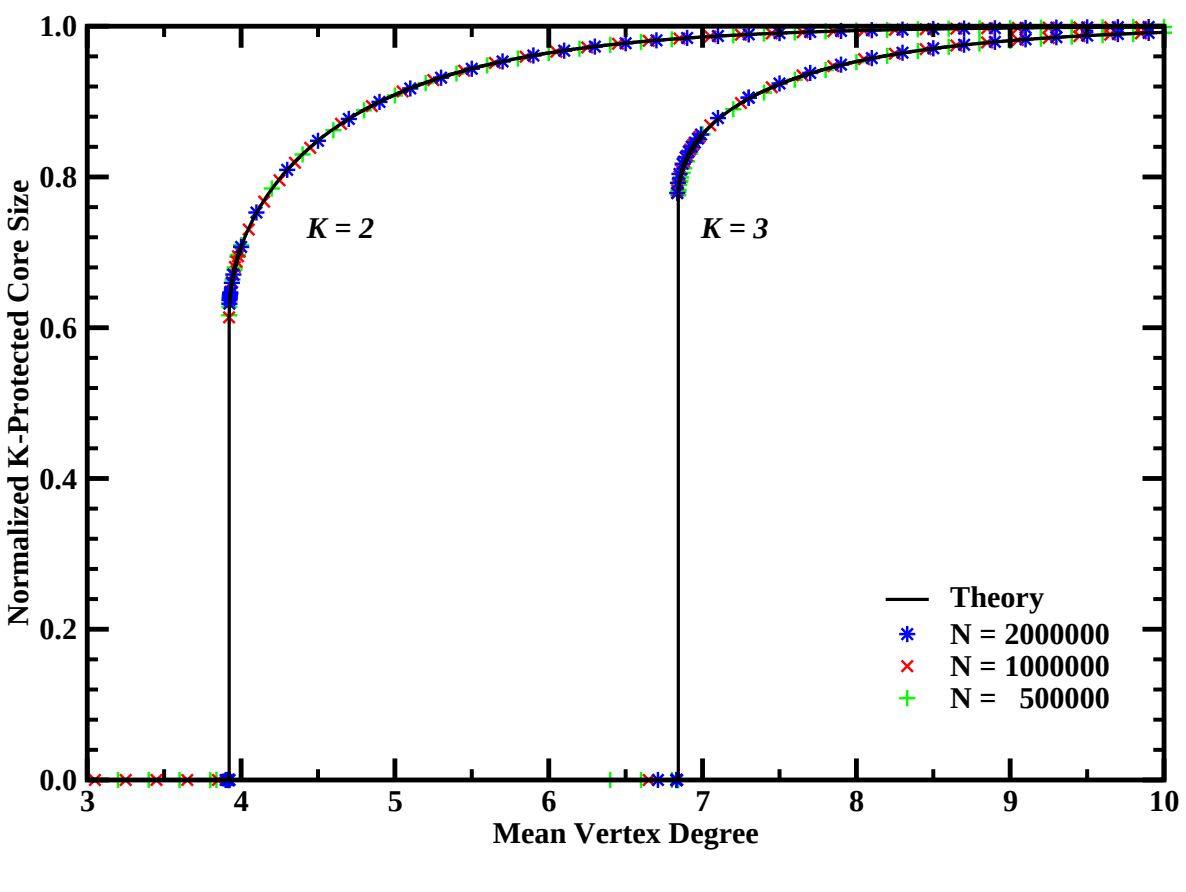

FIG. 2: (color online). Normalized K-protected core size for random Erdös-Rényi networks. Solid lines are analytical predictions for $K = 2$ and $K = 3$ at $N = \infty$, symbols are simulation results on three network samples with $N = 5 \times 10^5, 10^6, 2 \times 10^6$ vertices, respectively.

ER networks.— The degree profile of the ER network follows the Poisson distribution when $N \to +\infty$, $P(k) = e^{-c}c^k/k!$ [43]. Figure 2 shows how $n_{\text{p-core}}$ changes with mean vertex degree c. For $K = 2$ the theory predicts a percolation transition at $c = c^* \approx 3.9229$, with a jump of $n_{\text{p-core}}$ from 0 to $n^*_{\text{p-core}} \approx 0.6181$; for $K = 3$ the corresponding values are $c^* \approx 6.8426$ and $n^*_{\text{p-core}} \approx 0.7745$. These predictions are fully confirmed by simulation results on single network instances. The 2-core and core percolation transitions occur on ER networks at $c = 1$ and $c = e \approx 2.7183$, respectively, and are both continuous [12, 19]. The 2-protected core percolation transition is delayed to $c \approx 3.9229$ and becomes discontinuous but with critical scaling behavior. A discontinuous transition was also discussed concerning damage propagation in inter-dependent networks [35, 36].

RR networks and lattices.— All the vertices in a RR network and a D-dimensional hypercubic lattice has the same degree k_0, and the K-protected core contains the whole network when $k_0 \geq K$. If a randomly chosen fraction ρ of the edges are removed, the degree profile of the remaining network is $P(k) = [k_0!/k!(k_0-k)!](1-\rho)^k \rho^{k_0-k}$, and the mean vertex degree is $c = (1-\rho)k_0$. The existence of a K-protected core then depends on c. For example, our theory predicts that $n^*_{\text{p-core}} \approx 0.7725$ (for $k_0 = 4$) and $n^*_{\text{p-core}} \approx 0.7079$ (for $k_0 = 6$) at the 2-protected core percolation transition, with $c^* \approx 3.0789$ and $c^* \approx 3.3721$, respectively. As demonstrated in Fig. 3, the theoretical predictions are in full agreement with simulation results on single RR networks.

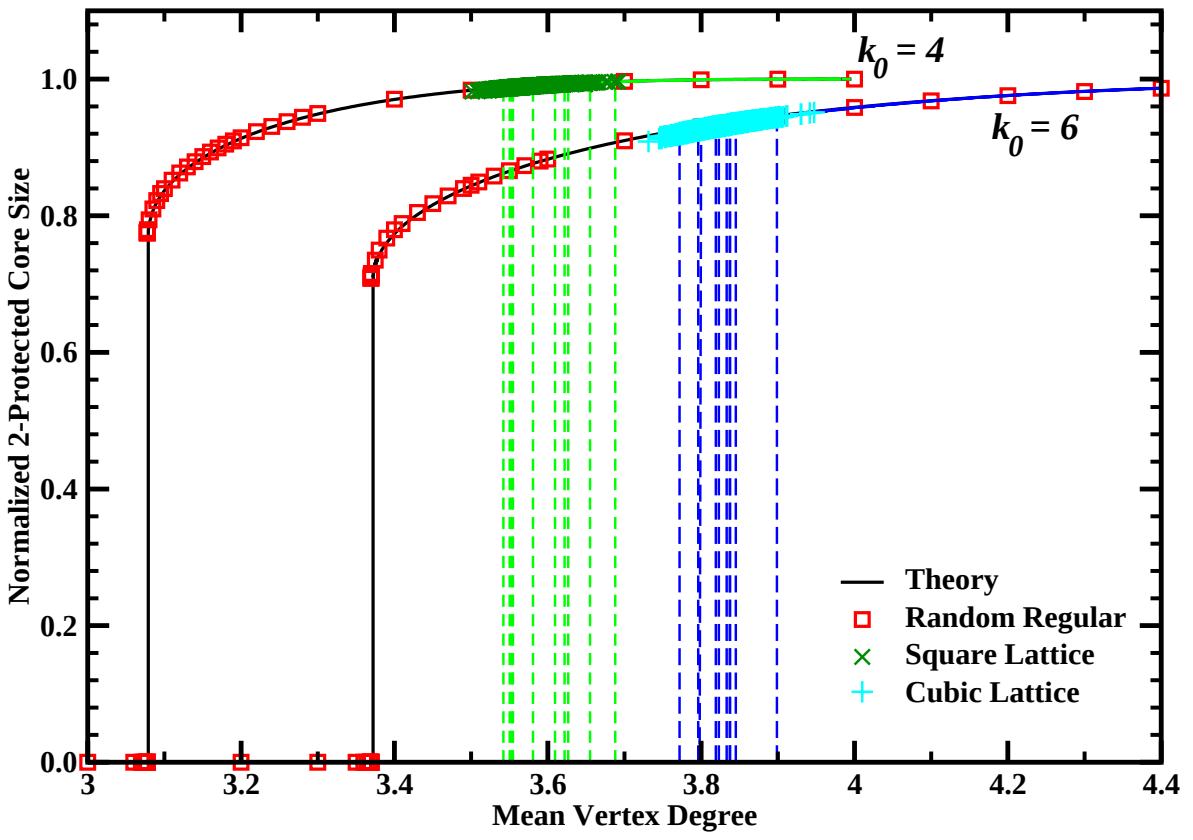

FIG. 3: (color online). Normalized 2-protected core size for RR networks with $k_0 = 4$ or $k_0 = 6$ (square symbols), the two-dimensional square lattice (cross symbols and dashed lines) and the three-dimensional cubic lattice (plus symbols and long-dashed lines). Each simulated network has $N = 10^6$ vertices. The plus and cross symbols mark the transition points of 1000 independent instances of the square and cubic lattice system, respectively; the dashed and long-dashed lines are the results obtained on 20 independent instances of the lattice systems. The solid lines are analytical predictions.

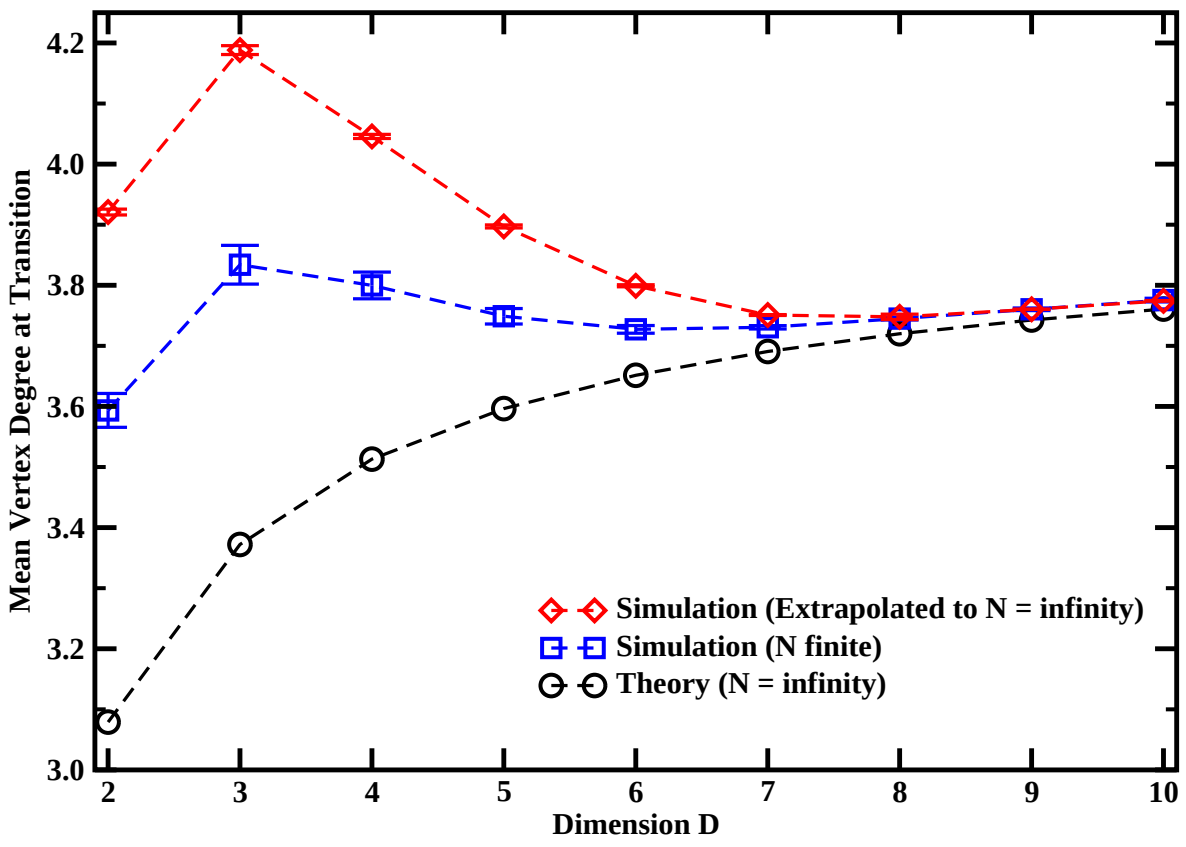

FIG. 4: (color online). The average value of the 2-protected core percolation transition point c^* for the D-dimensional hypercubic lattice (square symbols). Each data point is an average over 1600 network instances of $N \simeq 2 \times 10^6$ vertices. Diamonds are extrapolated simulation results to $N = +\infty$ [42], while circles are analytical predictions of c^* for $N = +\infty$.

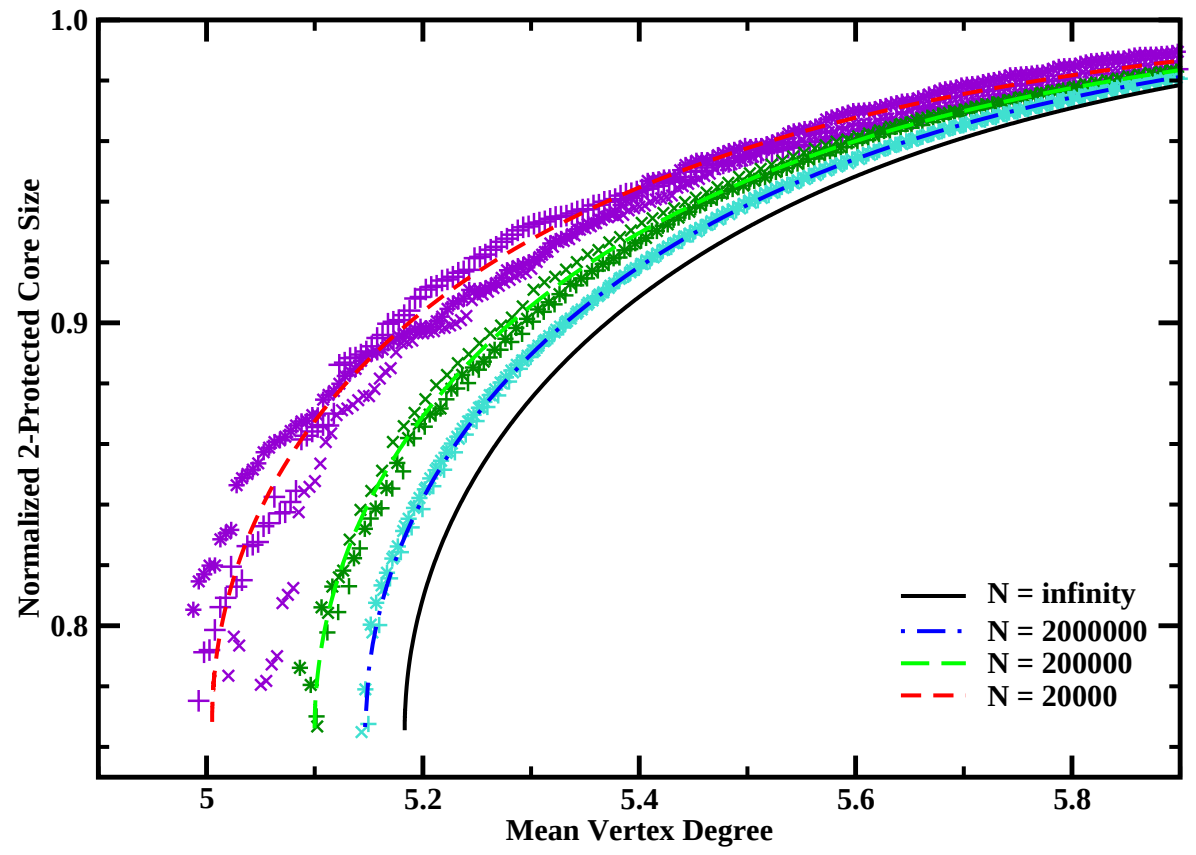

FIG. 5: (color online). Normalized 2-protected core size for random SF networks ($\lambda = 3$ and $k_{\min} = 4$). Lines are theoretical predictions with given vertex number N and degree profile $P(k)$, while symbols are simulation results on three independent instances with the same N and $P(k)$.

The discontinuous 2-protected core percolation is also simulated on a D-dimensional hypercubic lattice with side length L and periodic boundary conditions ($N = L^D$ and $k_0 = 2D$). For low dimensions the transition point c^* is remarkably larger than the value predicted by the theory (see Figs. 3 and 4), but the gap between the sample average of c^* and the predicted value shrinks as D increases. The transition point c^* fluctuates considerably for low dimensions (especially for $D = 2, 3$) and also depends on N (for $D \leq 7$) [42], and there is also no critical scaling behavior at c slightly beyond the transition point c^*. Interestingly however, the value of $n^*_{\text{p-core}}$ at the percolation transition is located on the theoretical curve, and $n_{\text{p-core}}$ follows the theoretical curve as c further increases (Fig. 3). Much further work needs to be done on the K-protected core percolation in low-dimensional systems.

Random SF networks.— Such networks are characterized by a degree decay exponent λ and a minimal degree $k_{\min}$. After a randomly chosen fraction ρ of the edges are removed, the degree profile of the remaining network is $P(k) \propto \sum_{m \geq \max(k_{\min}, k)}^{k_{\max}} m^{-\lambda} [m!/k!(m-k)!](1-\rho)^k \rho^{m-k}$, where the maximal degree $k_{\max}$ is determined by $NP(k_{\max}) \approx 1$ [45]. For single finite network instances the theoretical predictions on the K-protected core percolation transition point and the normalized size $n_{\text{p-core}}$ (using only the $P(k)$ as input) are in full agreement with simulation results [42]. As an example Fig. 5 shows the 2-protected core percolation results for random SF networks with $\lambda = 3$ and $k_{\min} = 4$. There are strong finite-size effects: the transition point c^* still increases with network size even for $N \geq 10^6$. Such finite-size effects are due to the highly connected hub vertices, they become even more stronger as the exponent λ decreases [42].

Discussion.— This work demonstrated that the K-protected core percolation is a discontinuous transition for any type of uncorrelated networks and any $K \geq 2$. The same conclusion holds for the more general (K, K')-protected core percolation transition with $K, K' \geq 2$ [42]. Our theory works both for infinite systems and single finite network instances. We have also applied the theory to 37 real-world networks, and the normalized 2-protected core sizes are correctly predicted for 32 of these networks [42].

We thank Zong-Hua Liu and Lei-Han Tang for commenting on an earlier version of the manuscript, and Hong-Bo Jin for technical assistance on computer simulation. JHZ is grateful to Prof. Zhong-Can Ou-Yang for encouragement and support. This work was supported by the National Basic Research Program of China (973 program, No. 2013CB932804), the Knowledge Innovation Program of Chinese Academy of Sciences (No. KJCX2-EW-J02), and the National Science Foundation of China (grant No. 10834011, 11121403, 11225526).

[1] D. Stauffer and A. Aharony, *Introduction to percolation theory* (CRC Press, Boca Raton, Florida, 1994), 2nd ed.
[2] S. N. Dorogovtsev, A. V. Goltsev, and J. F. F. Mendes, Rev. Mod. Phys. **80**, 1275 (2008).
[3] D. S. Callaway, M. E. J. Newman, S. H. Strogatz, and D. J. Watts, Phys. Rev. Lett. **85**, 5468 (2000).
[4] R. Cohen, K. Erez, D. ben-Avraham, and S. Havlin, Phys. Rev. Lett. **85**, 4626 (2000).
[5] M. E. J. Newman, S. H. Strogatz, and D. J. Watts, Phys. Rev. E **64**, 026118 (2001).
[6] D. J. Watts, Proc. Natl. Acad. Sci. USA **99**, 5766 (2002).

[7] M. E. J. Newman, Phys. Rev. E **66**, 016128 (2002).
[8] C. Castellano and R. Pastor-Satorras, Phys. Rev. Lett. **105**, 218701 (2010).
[9] A. Fessel, C. Oettmeier, E. Bernitt, N. C. Gauthier, and H.-G. Böbereiner, Phys. Rev. Lett. **109**, 078103 (2012).
[10] J. Chalupa, P. L. Leath, and G. R. Reich, J. Phys. C: Solid State Phys. **12**, L31 (1979).
[11] B. Pittel, J. Spencer, and N. Wormald, J. Combin. Theory B **67**, 111 (1996).
[12] S. N. Dorogovtsev, A. V. Goltsev, and J. F. F. Mendes, Phys. Rev. Lett. **96**, 040601 (2006).
[13] J. M. Schwarz, A. J. Liu, and L. Q. Chayes, Europhys. Lett. **73**, 560 (2006).
[14] G. Parisi and T. Rizzo, Phys. Rev. E **78**, 022101 (2008).
[15] M. Mézard, F. Ricci-Tersenghi, and R. Zecchina, J. Stat. Phys. **111**, 505 (2003).
[16] L. Correale, M. Leone, A. Pagnani, M. Weigt, and R. Zecchina, Phys. Rev. Lett. **96**, 018101 (2006).
[17] R. M. Karp and M. Sipser, in *The 22nd IEEE Annual Symposium on Foundations of Computer Science* (IEEE Computer Society, Los Alamitos, CA, USA, 1981), pp. 364–375.
[18] M. Bauer and O. Golinelli, Eur. Phys. J. B **24**, 339 (2001).
[19] Y.-Y. Liu, E. Csóka, H. J. Zhou, and M. Pósfai, Phys. Rev. Lett. **109**, 205703 (2012).
[20] H. J. Zhou, Phys. Rev. Lett. **94**, 217203 (2005).
[21] H.-J. Zhou, Phys. Rev. Lett. **109**, 199901 (2012).
[22] Y.-Y. Liu, J.-J. Slotine, and A.-L. Barabási, Nature **473**, 167 (2011).
[23] D. Achlioptas, R. M. D'Souza, and J. Spencer, Science **323**, 1453 (2009).
[24] O. Riordan and L. Warnke, Science **333**, 322 (2011).
[25] P. Grassberger, C. Christensen, G. Bizhani, S.-W. Son, and M. Paczuski, Phys. Rev. Lett. **106**, 225701 (2011).
[26] M. X. Liu, J. F. Fan, L. S. Li, and X. S. Chen, Eur. Phys. J. B **85**, 132 (2012).
[27] J. F. Fan, M. X. Liu, L. S. Li, and X. S. Chen, Phys. Rev. E **85**, 061110 (2012).
[28] J. Nagler, T. Tiessen, and H. W. Gutch, Phys. Rev. X **2**, 031009 (2012).
[29] M. Mézard and R. Zecchina, Phys. Rev. E **66**, 056126 (2002).
[30] A. Braunstein, M. Mézard, and R. Zecchina, Random Struct. Algorith. **27**, 201 (2005).
[31] G. Parisi, *On local equilibrium equations for clustering states*, arXiv: 0212047v2 (2002).
[32] S. Seitz, M. Alava, and P. Orponen, J. Stat. Mech.: Theor. Exp. p. P06006 (2005).
[33] K. Li, H. Ma, and H. J. Zhou, Phys. Rev. E **79**, 031102 (2009).
[34] F. Ritort and P. Sollich, Adv. Phys. **52**, 219 (2003).
[35] S. V. Buldyrev, R. Parshani, G. Paul, H. E. Stanley, and S. Havlin, Nature **464**, 1025 (2010).
[36] R. Parshani, S. V. Buldyrev, and S. Havlin, Proc. Natl. Acad. Sci. USA **108**, 1007 (2011).
[37] C. D. Brummitt, R. M. D'Souza, and E. A. Leicht, Proc. Natl. Acad. Sci. USA **109**, E680 (2012).
[38] Z. Toroczkai and K. E. Bassler, Nature **428**, 716 (2004).
[39] P. Echenique, J. Gómez-Gardeñes, and Y. Moreno, Europhys. Lett. **71**, 325 (2005).
[40] R. Albert and A.-L. Barabási, Rev. Mod. Phys. **74**, 47 (2002).
[41] D.-R. He, Z.-H. Liu, and B.-H. Wang, *Complex Systems and Complex Networks* (Higher Education Press, Beijing, 2009).
[42] Supplementary text in preparation.
[43] B. Bollobás, *Random Graphs* (Academic Press, Landon, 1985).
[44] M. Mézard and A. Montanari, *Information, Physics, and Computation* (Oxford Univ. Press, New York, 2009).
[45] H. J. Zhou and R. Lipowsky, Proc. Natl. Acad. Sci. USA **102**, 10052 (2005).